




**Manufacturer:**  
AFL

**Product Name:**  
AFL 24 Fiber I/O Tight Buffer Riser 50 MM - 2 Units

**Manufacturer Part Number:**  
KR0245601001

▶ [Click here for more details on the AFL 24 Fiber I/O Tight Buffer Riser 50 MM - 2 Units](#)



### Indoor/Outdoor Riser Tight Buffered Cable

Indoor/Outdoor Tight Buffered cables are specified for campus network cabling between buildings where interbuilding lengths are short enough that the installer can recognize savings from the lower costs of terminating tight buffered cables.

For indoor applications the cable is OFNR listed. For outdoor applications the cable is manufactured with an outer jacket that incorporates a UV stabilizer for protection against exposure to the sun plus an anti-fungus protection for use in underground applications.


**Features**

- Available with 2 to 24 fibers
- 12-fiber water-blocked sub-units
- Moisture-resistant, fungus-resistant and UV-resistant outer jacket

**Applications**

- ONFR inside plant and outside plant environments
- Campus LAN
- Building Interconnections
- Mining

**Cable Components**

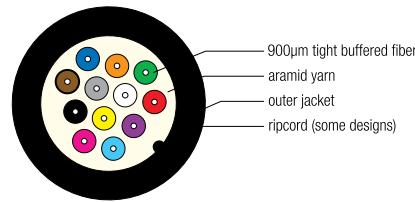

Premise Cable

**Fiber Specifications**

CORE SIZE/FIBER TYPE	ISO/IEC	MAXIMUM ATTENUATION (dB/km)			OVERFILL LAUNCH MIN. BANDWIDTH (MHz•km)		EMB <sub>c</sub> (MHz•km)	GIGABIT ETHERNET MAX. LINK DISTANCE (meters)		10 GIGABIT ETHERNET MAX. LINK DISTANCE (meters)	
		850 nm	1300 nm	1550 nm	850 nm	1300 nm		850 nm	1300 nm	850 nm	1300 nm
(6) 62.5 Giga-Link™ 300	OM1	3.5	1.2	N/A	200	600	N/A	300	550	32	—
(5) 50 Giga-Link™ 600	OM2	3.5	1.5	N/A	500	500	N/A	600	600	82	—
(L) 50 Laser-Link 300	OM3	3.0	1.2	N/A	1,500	500	2,000	1,000	550	300	—
(C) 50 Laser-Link 550	OM4	3.0	1.2	N/A	3,500	500	4,700	1,040	550	550	—
(W) AFL Wideband Multimode	OM5	3.0	1.2	N/A	3,500	500	4,700	1,040	550	550	—
(9) Single-mode (ITU G.652.D/G.657.A1)	OS2	N/A	0.5	0.5	N/A	N/A	N/A	N/A	5,000	N/A	10,000

Contact the professionals at Fiber Optic Center for a quote or to get more details.

[focenter.com](http://focenter.com) • 508-992-6464 | (800) 473-4237 • [sales@focenter.com](mailto:sales@focenter.com)

23 Centre Street • New Bedford, MA 02740 USA



**Manufacturer:**  
AFL

**Product Name:**  
AFL 24 Fiber I/O Tight Buffer Riser 50 MM - 2 Units

**Manufacturer Part Number:**  
KR0245601001

▶ [Click here for more details on the AFL 24 Fiber I/O Tight Buffer Riser 50 MM - 2 Units](#)

## Indoor/Outdoor Riser Tight Buffered Cable

Premise Cable

### Mechanical Data

CABLE TYPE	AFL NO. RISER	FIBER COUNT	NOMINAL DIAMETER inches (mm)	WEIGHT lbs/1000 ft (kg/km)	TENSION		BENDING RADIUS	
					lbs (N)		inches (cm)	
					INSTALLATION	LONG TERM	INSTALLATION	LONG TERM
Indoor/Outdoor Tight Buffered Cable	KR002★481#01	2	0.19 (4.8)	14 (21)	150 (660)	45 (198)	2.8 (7.2)	1.9 (4.8)
	KR004★481#01	4	0.19 (4.8)	15 (23)	150 (660)	45 (198)	2.8 (7.2)	1.9 (4.8)
	KR006★531#01	6	0.21 (5.3)	19 (28)	150 (660)	45 (198)	3.1 (8.0)	2.1 (5.3)
	KR008★561#01	8	0.22 (5.6)	23 (33)	150 (660)	45 (198)	3.3 (8.4)	2.2 (5.6)
	KR012★651#01	12	0.26 (6.5)	26 (38)	150 (660)	45 (198)	3.5 (9.0)	2.6 (6.5)
	KR018★801#01	18	0.31 (8.0)	40 (59)	300 (1320)	90 (396)	4.7 (12.0)	3.1 (8.0)
	KR024★871#01	24	0.33 (8.7)	46 (69)	300 (1320)	90 (396)	5.2 (13.1)	3.4 (8.7)

★ Fiber Types – Replace asterisk (★) in AFL number with number in the Fiber Specifications table on previous page.  
# Outer Jacket Color – Replace hashtag (#) in AFL number with number in the Cable Jacket Color table below.

### Cable Jacket Color\* Options

1 - Blue	8 - Black
2 - Orange	9 - Yellow
3 - Green	A - Violet
4 - Brown	B - Rose
5 - Slate	C - Aqua
6 - White	K - Erika Violet (RAL 4003)
7 - Red	

\* All jacket colors are UV stable and contain anti-fungal additive.  
For best performance, AFL recommends Black Outer Jacket.

### Qualifications

GOVERNING BODY	STANDARD CODE	COMPONENT
Telcordia	GR-20-CORE	Water-Blocked Cabled Buffer Tube Core
	GR-409-CORE	Sub-units
EIA/TIA	598-A	Sub-units
ICEA	S-104-696	Sub-units
MSHA		
RoHS	2002/95/EC	Cable

### Temperature Specifications

TEMPERATURE RANGE	
INSTALLATION	-20°C to +75°C
OPERATION	-40°C to +75°C
STORAGE	-40°C to +75°C

**Contact the professionals at Fiber Optic Center for a quote or to get more details.**

[focenter.com](http://focenter.com) • 508-992-6464 | (800) 473-4237 • [sales@focenter.com](mailto:sales@focenter.com)

23 Centre Street • New Bedford, MA 02740 USA