

Product Data

# Bufferlite™ DU-2008

**Product Description**

Bufferlite DU-2008 is a medium modulus matrix material used for tight buffering fiber up to 400-900 microns. DU-2008 was formulated for excellent strip and stability

**Product Benefits**


- Optically clear
- Excellent strippability
- Fast cure
- Patent-protected

**Performance Characteristics**


Liquid Coating	Typical Properties
Viscosity, 25 °C, mPa•s	1200
Density, 23 °C, kg/m3	1102

Cured Coating* (Tested at 23 °C, 50% R.H.)	Typical Properties
Secant modulus, 2.5% strain, **	320
Elongation**, %	14
Tensile strength**, MPa 12	12

Viscosity vs. Temperature  
Typical DU-2008

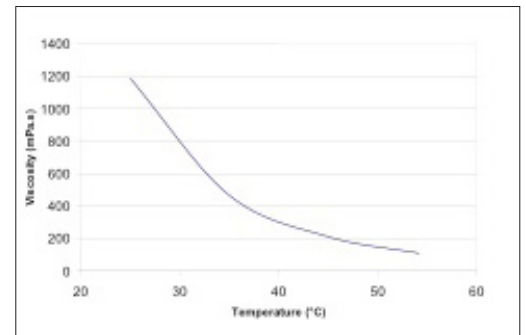

Dynamic Mechanical Analysis  
DU-2008

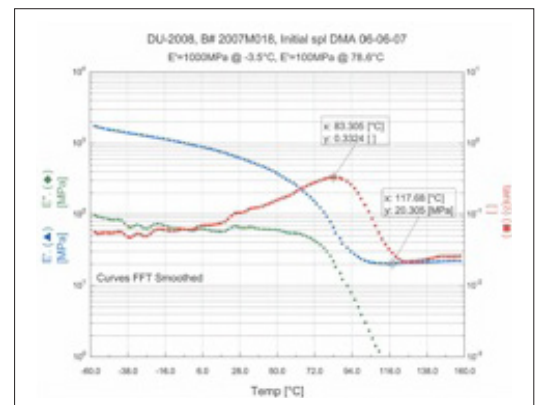



## Test Methods

Detailed test methods may be obtained through your Covestro sales representative.

## Filtration

Bufferlite™ materials are manufactured using fine filtration techniques designed to minimize particulate matter and to ensure high strength and uniform product performance.

## Storage Conditions

Bufferlite™ tight buffer materials should be stored in their original containers at temperatures between 15° and 30°C. The bottles that are used for these are UV opaque and allow for air to diffuse through the plastic which prevents premature gelation.

## Shelf Life

Bufferlite™ tight buffer materials have a shelf life of 18 months from the date of manufacture, provided recommended storage conditions are properly maintained.

## Safety Information

This product is formulated with multifunctional acrylates which may cause skin and eye irritation and/or skin sensitization. Safety data sheets for each product are available from your Covestro sales representative. All safety and handling recommendations should be followed carefully.

## Conversions

$$\begin{aligned} N &= g \cdot f \times 9.807 \times 10^{-3} & kg \cdot mm^{-2} &= MPa \times 0.102 \\ psi &= MPa \times 145 & mPa \cdot s &= cps \end{aligned}$$

## **Contact Us:**

**Covestro Desotech Inc.**  
1122 St. Charles Street  
Elgin, Illinois 60120  
USA  
Tel: +1-847-697-0400

**Covestro Desotech b.v.**  
Slachthuisweg 30  
3151 XN Hoek van Holland  
The Netherlands  
Tel: +31-1743-15391

**Covestro Desotech Specialty Chemicals Ltd.**  
476 Li Bing Road  
Zhangjiang Hi-Tech Park  
Pudong New Area  
Shanghai 201203, China  
Tel: +86-21-6141-8064

The manner in which you use our products, technical assistance and information (whether verbal, written or by way of production evaluations), including any suggested formulations and recommendations, are beyond our control. Therefore, it is imperative that you test our products to determine suitability for your processing and intended uses. Your analysis must at least include testing to determine suitability from a technical, health, safety, and environmental and regulatory standpoint. Such testing has not necessarily been done by Covestro, and Covestro has not obtained any approvals or licenses for a particular use or application of the product, unless explicitly stated otherwise.

Any samples provided by Covestro are for testing purposes only and not for commercial use.

Unless we otherwise agree in writing, all products are sold strictly pursuant to the terms of our standard conditions of sale which are available upon request.

All information and including technical assistance is given without warranty or guarantee and is subject to change without notice. It is expressly understood and agreed by you that you assume and hereby expressly release indemnify us and hold us harmless from all liability, in tort, contract or otherwise, incurred in connection with the use of our products, technical assistance, and information. Any statement or recommendation not contained herein is unauthorized and shall not bind us. Nothing herein shall be construed as a recommendation to use any product in conflict with any claim of any patent relative to any material or its use. No license is implied or in fact granted under the claims of any patent.