




**Manufacturer:**  
Luciol Instruments

**Product Name:**  
Luciol LOR-220 High Resolution OTDR

**Manufacturer Part Number:**  
LOR-220




▶ [Click here for more details on the Luciol LOR-220 High Resolution OTDR](#)



# LOR-220

IR

## High Resolution Optical Time-Domain Reflectometer

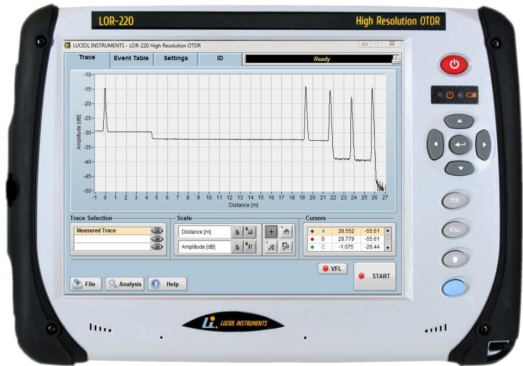

The LOR-220 from Luciol Instruments is a fully portable high resolution OTDR. It is similar in shape and feel to a standard OTDR but achieves unprecedented resolution. With a fixed pulse-width of only 1 ns the LOR-220 distinguishes events with 10 cm separation and has a 40 cm attenuation dead-zone. Its unique dynamic range for short pulse lengths (> 14 dB for 1 ns pulses) enables testing optical assemblies with high insertion losses, even over very short distances. The LOR-220 can **characterize** the original assembly, **monitor** possible evolution for preventive maintenance purposes and **troubleshoot** in case of a fault in the optical link. The IR version of the LOR-220 is available for up to four wavelengths in the range of 1000-1650 nm and for several fiber types. Even two different fiber types can be combined in a single instrument when choosing the dual output option.

### APPLICATIONS

- See and localize events, which no other OTDR can show, such as weak reflections or attenuations immediately after a larger reflection or an optical splitter.
- Fiber optic sensors and fiber assemblies.
- Fiber manufacturing and verification.
- Loss and optical return loss testing for optical components.
- Aviation, aerospace, defense, telecommunication and more

**Wavelength range**  
1000-1650 nm

**Single or dual output (SMF/ MMF)**

**Industry-leading resolution (1 ns pulses)**

**Fully portable OTDR format**

**High dynamic range with short pulses**

**Measures IL and ORL for all types of connectors**

**Up to four wavelengths**

**Custom systems for most fiber types and wavelengths**

**Patented design; US patent # 7,593,098**

**Contact the professionals at Fiber Optic Center for a quote or to get more details.**

[focenter.com](http://focenter.com) • 508-992-6464 | (800) 473-4237 • [sales@focenter.com](mailto:sales@focenter.com)

23 Centre Street • New Bedford, MA 02740 USA

*Product specifications and data are subject to change without notice.*



**Manufacturer:**  
Lucioli Instruments

**Product Name:**  
Lucioli LOR-220 High Resolution OTDR

**Manufacturer Part Number:**  
LOR-220

▶ [Click here for more details on the Lucioli LOR-220 High Resolution OTDR](#)

## SPECIFICATIONS

### Optical

Standard wavelength options\* ( $\pm 20$  nm):  
1310 nm, 1480 nm, 1490 nm, 1550 nm, 1625 nm or 1650 nm

Standard fiber types\*:  
Single Mode (9/125  $\mu$ m)  
Multimode (50 or 62.5/125  $\mu$ m)

Optical connector:  
Universal, APC or PC type, with FC, SC or ST adapter

Optical pulse width: 1 ns

Measurement range:  
0.5, 1.2, 2.5, 5, 10, 20, 40, 80, 160 km

Distance units:  
kilometer, meter, feet, miles, time(ns)

Sampling resolution:  
any multiple of 2.5 cm (250 ps)

Dynamic range<sup>1</sup>:  
Rayleigh backscattering<sup>2</sup>:  $> 14$  dB (S/N = 1)

Deadzones<sup>3</sup>:  
Event dead-zone: 10 cm  
Attenuation dead-zone<sup>3</sup>: 40 cm

Distance accuracy:  
 $\pm (10 \text{ mm} + 5 \times 10^{-5} \times [\text{fiber length}])$

Reflectance accuracy<sup>4</sup>:  $\pm 1.5$  dB

Loss accuracy<sup>4</sup>:  $\pm 0.1$  dB  $\pm 0.02$  dB/dB

### Hardware

OS: Windows 11 (Windows 10 on request)  
Processor: Intel N4200  
RAM: DDR3L, 4 GB  
Storage: SSD, 120 GB (more optional)  
Display: Touchscreen TFT 10.4" (800x600)  
Interfaces: 2x Ethernet RJ45  
4x USB 3.0  
1x HDMI  
1x Headphone/Microphone  
WiFi/Bluetooth (optional)

Power rating: 15W/4 A  
Power input: AC operation with 100 to 240 VAC, 50/60 Hz universal adapter, DC operation on batteries (Li Ion, 6.2 Ah)  
Battery operating time: 5 h  
Battery charging time: 3.5 h  
Size: 320 x 240 x 90 mm, Weight: 3.1 kg

### Environmental

Operating temperature: 0° to +40°C (32° to 104° F)  
Storage temperature: -20° to +60° (-4° to 140° F)  
Relative humidity:  $\leq 80\%$  (0 to 30°C), decreasing linearly to 50% at 40 °C  
Maximum operation altitude: 2000 m  
Pollution degree: 2

### Options:

**-FSV**  
Fiber microscope  
End-face verification of connectors, USB connection, Video displayed on LOR screen.

**-DOP**  
Dual output with two different fiber types. \*\*

**-OSW**  
Optical switch for semi-automatic multi fiber testing. Internal (up to 12 channels) or external switch with USB connection. \*\*

### Ordering information

LOR-22X-FFF-W1(/W2/W3/W4)-CC;  
X= # of wavelengths;  
FFF= fiber type: SMF, MMF62, MMF50  
W1, W2...: wavelengths with source type (FP lasers, LED)  
CC= connector type: ASC, AFC, SC, FC, ST, LC

### Ordering example:

LOR-223-SMF-1310FP/1480FP/1625FP-AFC  
LOR-220 SMF, with 3 wavelengths, one FP laser at 1310 nm, one FP laser at 1550 nm, and one FP laser at 1625 nm, FC/APC connector.

\*Other wavelengths and configurations are available on a custom basis. Please contact Lucioli Instruments with your special requirements.

\*\* Please contact Lucioli Instruments for details

### Notes:

1: Typical  
2: At a wavelength of 1310 nm  
3: For ORL = 45 dB  
4: For a LED source (or FP under specific conditions)

**Contact the professionals at Fiber Optic Center for a quote or to get more details.**

[focenter.com](http://focenter.com) • 508-992-6464 | (800) 473-4237 • [sales@focenter.com](mailto:sales@focenter.com)

23 Centre Street • New Bedford, MA 02740 USA