



**Manufacturer:**  
Phenix Fiber Optics

**Product Name:**  
Phenix fibersect.single™, Mechanical Connector Cleaver for Single Fiber Connectors

**Manufacturer Part Number:**  
PNX-FS-SGL



▶ Click here for more details on the Phenix fibersect.single™, Mechanical Connector Cleaver for Single Fiber Connectors



## fibersect.single™ Epoxy Fiber Cutter

### Overview

The fibersect.single™ quickly cuts off the epoxy and fibers protruding from the face of connector ferrules during the installation process. In less than a second, it produces a flat cut close to the ferrule face, creating the ideal surface for polishing. Throughput is improved by eliminating manual steps such as hand cleaving, de-nubbing and epoxy removal. The fibersect.single is optimized for cutting Simplex and Duplex epoxied connector ferrules. With a simple one button operation, small footprint, and battery power, the fibersect.single provides exceptional versatility, portability, and ease of use in the production environment.



Inserting the LC connector



2.5mm SC ferrule, 75 µm cut

### Features and Benefits

- Optimized for cutting Simplex and Duplex connector ferrules, such as the LC, LC-APC, LC-Duplex, SC, SC-APC, SMA and many others
- Simple one button operation; requires minimal operator training
- Fast cutting cycle
- Long saw lifetime
- Small footprint, lightweight, portable, battery powered
- Fast, easy cut length adjustment
- Quick adapter change
- Safely collects cutting waste
- Options: Connector and ferrule adapters, vacuum waste collection, footswitch cut actuator, cut counter

### Specifications

- Recommended adapters: LC, LC-APC, LC-Duplex, SC, SC-APC, ST, FC, FC-APC, MDC, MDC-J, and SMA connectors with fiber diameter of <300 µm. Bare ferrule adapters are also available.
- Custom adapters are available
- Cut cycle time: ~1 sec
- Recommended cut length from ferrule face: 75 µm
- Adjustable cut length from ferrule face: 0-600 µm; 5 µm adjusting resolution
- Maximum fiber protrusion from ferrule face before cutting: 10 mm
- Cut angle: <+/- 0.5°
- Adapter changeover time: <30 sec
- Warranty: One year
- Expected saw lifetime: > 700,000 cuts when cutting LC or SC ferrules
- Power: 100-240 Vac, 50-60 Hz, 0.48 A; with rechargeable battery
- Battery capacity: >500 cuts when cutting LC or SC ferrules
- Dimensions: W x D x H / 3.75 x 5.25 x 3.50 in / 95 x 133 x 89 mm
- Weight: 2 lbs / 0.9 kg

Contact the professionals at Fiber Optic Center for a quote or to get more details.

[focenter.com](http://focenter.com) • 508-992-6464 | (800) 473-4237 • [sales@focenter.com](mailto:sales@focenter.com)

23 Centre Street • New Bedford, MA 02740 USA

Product specifications and data are subject to change without notice.



**Manufacturer:**  
Phenix Fiber Optics

**Product Name:**  
Phenix fibersect.single™, Mechanical Connector Cleaver for Single Fiber Connectors


**Manufacturer Part Number:**  
PNX-FS-SGL

▶ [Click here for more details on the Phenix fibersect.single™, Mechanical Connector Cleaver for Single Fiber Connectors](#)



**Product Comparison**  
fibersect.multi.2 & fibersect.single

The Phenix Fiber Optics fibersects are designed to cut all epoxied ferrules and connectors, including the LC and SC using 125 µm fibers, the 4-72 fiber MT ferrules and SMA connectors with fibers up to 4000 µm in diameter. To achieve the best results with a fast cutting time and maximum saw lifetime, two distinct fibersects are now available: the **fibersect.multi.2** and the **fibersect.single**. They both share a new cutting configuration that provides the smoothest cut possible, permitting a closer cut to the ferrule face and producing the ideal surface for polishing. The fibersect.single contains a finer saw, optimized for cutting smaller diameter epoxied fibers, while the fibersect.multi.2 uses a coarser saw best suited for cutting 4-72 fiber MT ferrules and large diameter SMA fibers. Shown below is a side-by-side comparison.

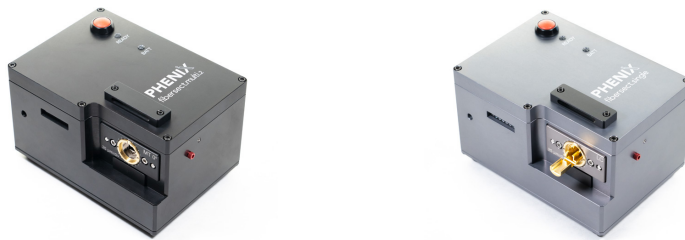

| Specifications           | fibersect.multi.2  | fibersect.single  |
|--------------------------|--|---|
| Cut Cycle Time           | < 2 seconds for 12-fiber MT ferrules   | < 3 second for LC or SC ferrules  |
| Recommended Adapters     | MT, MT-APC, SMA with 300-4000 µm fibers; custom adapters are available   | LC, LC-APC, LC-D, SC, SC-APC, ST, FC, FC-APC, MDC, MDC-J, SMA with < 300 µm fibers, and others; custom adapters are available |
| Adapter Changeover       | < 30 seconds   |   |
| Options                  | Connector and Ferrule Adapters, Vacuum Dust Collector, Foot Switch, Cut Counter, Adjustable Stand, Folding Stand |   |
| Maximum Fiber Protrusion | 7 mm from face of ferrule before cutting   |   |
| Cut Length               | Adjustable, 0 - 600 µm from the face of ferrule; 5 µm adjusting resolution                                       |   |
| Recommended Cut Length   | 100 µm for MT and MT-APC; 150 µm for SMA with > 300 µm fiber diameter  | 75 µm for LC and SC ferrules; 100 µm for SMA with < 300 µm fiber diameter   |
| Cut Angle                | +/- 0.5°   |   |
| Warranty                 | One year   |   |
| Expected Saw Lifetime    | > 600,000 cuts when cutting 12-fiber MT ferrules   | > 700,000 cuts when cutting LC or SC ferrules   |
| Power Supply             | 110-240 Vac, 50-60 Hz, 0.48 A, with rechargeable battery   |   |
| Battery Capacity         | > 400 cuts when cutting 12-fiber MT ferrules   | > 500 cuts when cutting LC or SC ferrules   |
| Dimensions (W x D x H)   | 4.25 x 5.75 x 3.17 in / 108 x 146 x 80 mm  |   |
| Weight                   | 2 lbs, 0.9 kg  |   |

**Contact the professionals at Fiber Optic Center for a quote or to get more details.**

[focenter.com](http://focenter.com) • 508-992-6464 | (800) 473-4237 • [sales@focenter.com](mailto:sales@focenter.com)

23 Centre Street • New Bedford, MA 02740 USA

*Product specifications and data are subject to change without notice.*