



Manufacturer:

Dymax

Product Name:

T20010™ Micro-Dot Hand-held Epoxy Dispenser - Lever Actuated

Manufacturer Part Number:

T20010

Click here for more details on the T20010™ Micro-Dot Hand-held Epoxy Dispenser - Lever Actuated





- Simple, manual operation that requires no electric or air
- Positive-displacement dispensing with adjustable stroke
- Control over dispense volume, assuring an accurate dispense despite viscosity and syringe level changes
- Dispenses a wide range of low-to-high viscosity materials
- · Portable; can be used anytime, anywhere
- Utilizes disposable syringe as fluid reservoir for easy product changeover
- Dispensers design eliminates the risk of material contamination during dispense
- Compatible with 3, 5, and 10 mL machine-ready syringes
- Available with thumb or lever actuation

Micro-Dot™

Manual Syringe Dispenser

The Micro-Dot™ portable syringe dispenser offers positive-displacement accuracy for dispense volumes as small as 0.0003 mL. Once a volume is set it can be repeated with accuracy. This syringe dispenser utilizes a pre-packaged disposable syringe as its fluid reservoir, preventing any contact between the fluids and the dispenser eliminating fluid contamination during dispense. With the proper dispense tip selection, the Micro-Dot is suitable for dispensing a wide range of low-to-high viscosity fluids including pastes, lubricants, adhesives, sealants, and more.



Lever Activated Micro-Dot Syringe Dispenser (T20010)



Thumb Activated Micro-Dot Syringe Dispenser (T20000)

Contact the professionals at Fiber Optic Center for a quote or to get more details.





Manufacturer:

Dymax

Product Name:


T20010™ Micro-Dot Hand-held Epoxy Dispenser - Lever Actuated

Manufacturer Part Number:

T20010

Click here for more details on the T20010™ Micro-Dot Hand-held Epoxy Dispenser - Lever Actuated

Specifications	
Part Number	T20000 Thumb Activated T20010 Lever Activated
Dispenser Type	Manual, positive displacement syringe dispenser
Activation	Manual by lever or thumb actuator
Shot Size	Minimum: 0.0003 mL (400 cP material with 25 gauge taper tip) Maximum: 0.170 mL (400 cP material with 14 gauge taper tip)
Dimensions (L x W x H)	4.5" x 0.87" x 2.13" (11.4 cm x 2.2 cm x 5.4 cm)
Weight	2.8 oz. (81.3 g)
Unit Warranty	1 year from purchase

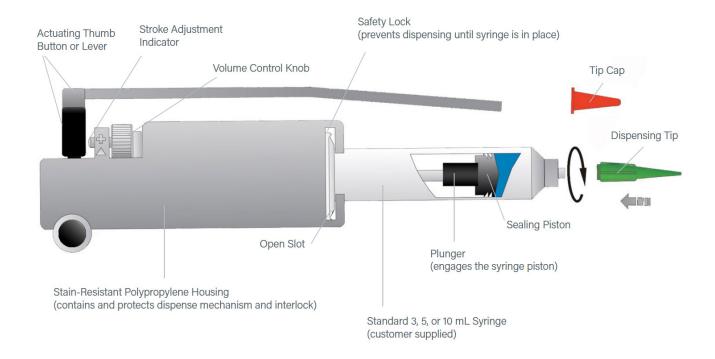

Contact the professionals at Fiber Optic Center for a quote or to get more details.