



**Manufacturer:**  
ÅngströmLap®

**Product Name:**  
Ultimas™- U New Final Polish Lapping Film 4.25" (110mm) - ÅngströmLap®

**Manufacturer Part Number:**  
ULT026051103N100



▶ [Click here for more details on the Ultimas™- U New Final Polish Lapping Film 4.25" \(110mm\) - ÅngströmLap®](#)

## PRODUCT SPECIFICATIONS:

### Description by Application

FO Type Name: 026Ultimas-NEC3

Color: Natural

### Tape Specifications

Total Thickness:  $78.5 \pm 2.0 \mu\text{m}$

Surface Roughness:  $0.09 \pm 0.05 \mu\text{m}$

### Abrasive Type

Particle Type: Silicon dioxide

### Base Film Type

Base Film Material: Poly-ethylene terephthalate

Base Film Thickness: 3 mil (75  $\mu\text{m}$ )

### Process Parameters

Type: NEC3



**Contact the professionals at Fiber Optic Center for a quote or to get more details.**

[focenter.com](http://focenter.com) • 508-992-6464 | (800) 473-4237 • [sales@focenter.com](mailto:sales@focenter.com)

23 Centre Street • New Bedford, MA 02740 USA

*Product specifications and data are subject to change without notice.*



**Manufacturer:**  
ÅngströmLap®

**Product Name:**  
Ultimas™- U New Final Polish Lapping Film 4.25" (110mm) - ÅngströmLap®

**Manufacturer Part Number:**  
ULT026051103N100

▶ Click here for more details on the Ultimas™- U New Final Polish Lapping Film 4.25" (110mm) - ÅngströmLap®

## PRODUCT SPECIFICATIONS:

**Unit:** Standard packaging of 100

Roll - Product that has already been slit down for samples or to product specifications requested by the customer. This specification standard covers tapes for various applications.

Disc - Product that has been slit down into rolls then die cut into circular discs to conform to customer specified sizes. This specification standard covers discs for various applications

Sheet - Product that has been slit down into rolls then sheet cut into rectangular sheets to conform to customer specified sizes. This specification standard covers sheets for various applications

**Description:**

Example: 026Ultimas-NEC3

Abrasive Material	Process Type
026Ultimas	NEC3
Silicon dioxide	Mixing Ratio Type

**Lot Description:**

Indicated by 10 digits number.  
Automatic numbering by enterprise resource planning system.  
Example: 0000012345

**Product Specifications:**

Mipox product standards are specified by the abrasive film Surface roughness and the total thickness diameter and length.

**Storage Environment:**

- Temperature: 10 to 50 centigrade
- Humidity: 20 to 80%

**Product Life:** Mipox product life is guaranteed up to 5 years from the manufactured date

**Recommended Usage:** Usage amounts are conservative estimates and may vary based on individual conditions. Please contact Fiber Optic Center to optimize these usage numbers. Specifications subject to change without notice.



Contact the professionals at Fiber Optic Center for a quote or to get more details.

[focenter.com](http://focenter.com) • 508-992-6464 | (800) 473-4237 • [sales@focenter.com](mailto:sales@focenter.com)

23 Centre Street • New Bedford, MA 02740 USA

Product specifications and data are subject to change without notice.




**Manufacturer:**  
ÅngströmLap®

**Product Name:**  
Ultimas™- U New Final Polish Lapping Film 4.25" (110mm) - ÅngströmLap®

**Manufacturer Part Number:**  
ULT026051103N100



▶ [Click here for more details on the Ultimas™- U New Final Polish Lapping Film 4.25" \(110mm\) - ÅngströmLap®](#)

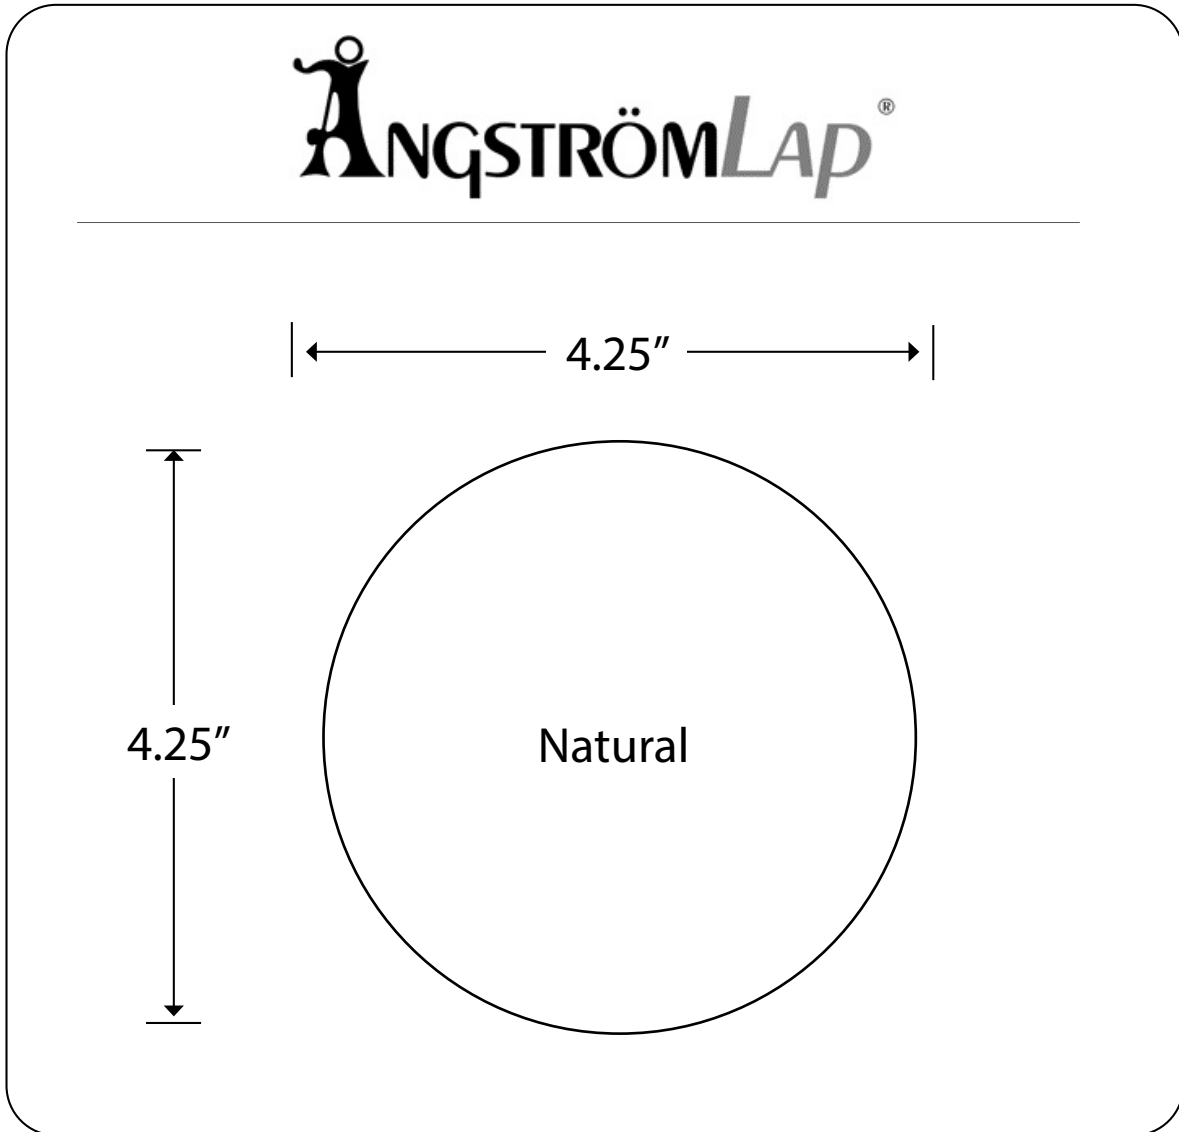

**Contact the professionals at Fiber Optic Center for a quote or to get more details.**

[focenter.com](http://focenter.com) • 508-992-6464 | (800) 473-4237 • [sales@focenter.com](mailto:sales@focenter.com)

23 Centre Street • New Bedford, MA 02740 USA

*Product specifications and data are subject to change without notice.*