

Manufacturer:
Viavi

Product Name:
Viavi MAP-300 3-Slot Mainframe

Manufacturer Part Number:
MAP-330A-B

>> Find Out More Details on the Viavi MAP-300 3-Slot Mainframe <<

The VIAVI Solutions Multiple Application Platform (MAP-300) is an optical test and measurement platform optimized for compact cost-effective development and manufacturing of optical communications technology.

From the original Multiple Application Platform (MAP) system released in 2001 as part of JDSU to the new third generation MAP-300 Series, the MAP system is the heart of the VIAVI optical test solutions for labs and manufacturing. With unmatched scalability, users can be assured that our solutions will meet their current and future needs. MAP-300 provides the foundation to our entire portfolio, enabling scalability and efficiency for manufacturing optical network elements, modules and components.

Customer Focused Innovation

The new MAP-300 builds upon the proven strengths of the MAP System while adding innovation where it matters most for our customers. Backwards compatible support for the installed automation base, combined with several new features, including an HTML-based GUI for multi-user environments, gives our customers the capabilities they need to achieve their goals. We can't wait to see what you will accomplish with the new MAP-300!



Key Features

- Available in rackmount, reverse-rackmount and benchtop mainframe configurations
- HTML-based graphical user interface gives consistent user experience both locally and remotely
- Field-replaceable controller includes an integrated 3.5-inch LCD touchscreen for network and system status
- Support for USB 3.0 port, 15.6-inch external monitor, and ethernet
- Optional GPIB, additional ethernet ports and additional USB and trigger modules
- SCPI logical interface for automation programming, with remote programming supported via TCP/IP (LXI) over ethernet, GPIB and direct socket
- Multi-user capability
- Backward compatible with MAP2xx series cassettes and remote-control support
- Hot swappable modules
- Supports the MAP-Series asset management tool MAPcc

Applications

- General purpose fiber-optic lab use
- Manufacturing test automation
- DWDM/WSS test
- Connectivity IL/RL
- Polarization scrambling and OSNR


Compliance

- MAP Series cassettes include amplifier and source cassettes classified as either Class 3B or Class 1M Laser products. While operating in a MAP Series mainframe, cassettes meet the requirements of the IEC 60825-1 standard and comply with 21 CFR 1040.10 and 1040.11, except for deviations pursuant to Laser Notice 50, dated June 24, 2007.

Contact the professionals at Fiber Optic Center for a quote or to get more details.

focenter.com • 508-992-6464 | (800) 473-4237 • sales@focenter.com

23 Centre Street • New Bedford, MA 02740 USA



Manufacturer:
Viavi

Product Name:
Viavi MAP-300 3-Slot Mainframe

Manufacturer Part Number:
MAP-330A-B

>> Find Out More Details on the Viavi MAP-300 3-Slot Mainframe <<

MAP-330 Three-Slot Mainframes

Each MAP-330 mainframe consists of a 3U chassis that can house up to three cassettes, plus a field-replaceable controller. The rackmount versions are half 19" rack wide, so two units can be mounted side-by-side. An optional touch screen can be docked on the mainframe of a benchtop three-slot chassis for an easy portable, self-contained system.



Figure 4 - MAP-330 benchtop mainframe, front and rear view




Figure 5 - MAP-330 benchtop mainframe with 15.6-inch touchscreen docked, front view



Figure 6 - MAP-330 3U half 19-inch rackmount mainframe, front view

Contact the professionals at Fiber Optic Center for a quote or to get more details.

focenter.com • 508-992-6464 | (800) 473-4237 • sales@focenter.com
23 Centre Street • New Bedford, MA 02740 USA



Manufacturer:
Viavi

Product Name:
Viavi MAP-300 3-Slot Mainframe

Manufacturer Part Number:
MAP-330A-B

>> Find Out More Details on the Viavi MAP-300 3-Slot Mainframe <<

Simple, Intuitive Graphical Controller

The MAP-300 chassis includes a 3.5-inch touch screen that supports intuitive swipes for easy navigation. This local touchscreen provides access to connection and configuration settings.

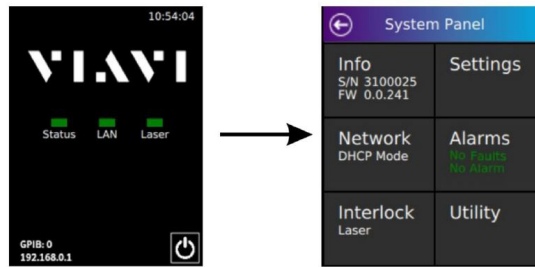


Figure 7 - MAP-300 local touchscreen

Users can access the MAP-300 GUI from a mainframe locally or remotely via Ethernet. The MAP-300 GUI allows multi-user access via a supported web browser by entering the IP address acquired from the controller in the location field of the web browser. The slot configuration of a mainframe is represented by widgets (one per slot) on the MAP-300 dashboard. When a slot is populated, the widget representing that slot identifies the cassette and provides quick access to the main device settings. The user can change the size of the widget to see more detail on specific cassettes. A detailed view of a cassette is available, whilst still having a complete view of all other slots.

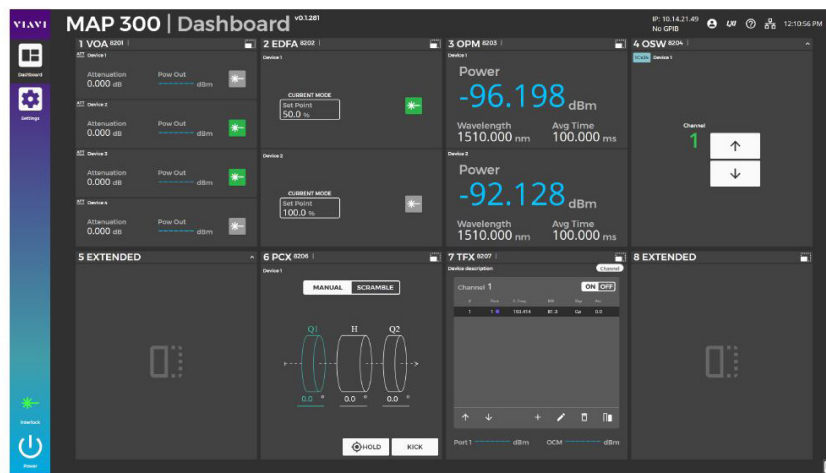



Figure 8 - MAP-380 Dashboard GUI example.

The settings panel gives you access to network and system settings, as well as remote chassis and license settings if available. The MAP-300 can be rebooted or placed in standby mode using through the GUI or local touchscreen.

Contact the professionals at Fiber Optic Center for a quote or to get more details.

focenter.com • 508-992-6464 | (800) 473-4237 • sales@focenter.com

23 Centre Street • New Bedford, MA 02740 USA



Manufacturer:
Viavi


Product Name:
Viavi MAP-300 3-Slot Mainframe

Manufacturer Part Number:
MAP-330A-B

>> Find Out More Details on the Viavi MAP-300 3-Slot Mainframe <<

Control Interfaces


As a full-fledged member of the MAP family, all remote interfaces can interoperate with the three-slot and eight-slot versions. It includes optimized Interchangeable Virtual Instrument (IVI) drivers for ease of use with popular application-development environments, such as LabVIEW, Visual C++, Visual Basic, and LabWindows™, to provide full control of the modules and drop-in instrument programming capabilities. These capabilities let test programmers focus on test-level functions and sequences rather than the details required to communicate with the specific modules in the MAP system. The IVI drivers also include a simulation mode that lets developers capture system configurations so they can perform most of their development offline, freeing hardware for other purposes. These features make test automation development and debugging fast and easy. All MAP series module and platform commands conform to the Standard Commands for Programmable Instruments (SCPI) command language.

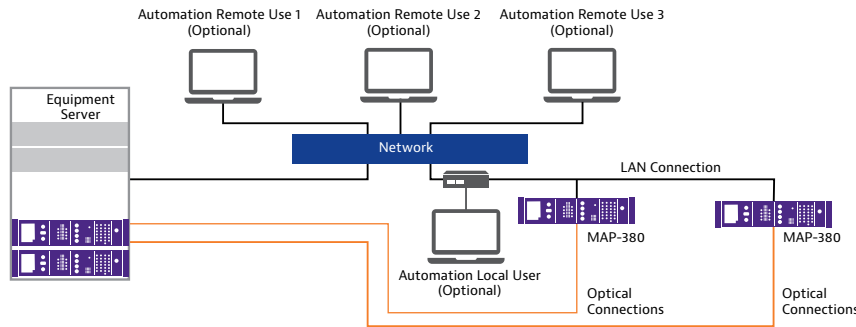

Extensive Input/Output Interfaces

All mainframe configurations include:

- Ethernet port for remote communication.
- 4 USB host ports for installing peripheral devices, including USB drives, a mouse, and a keyboard.
- One USB host port for the optional touchscreen.
- Integrated 3.5-inch LCD touchscreen for network and system status information.
- All mainframes can support up to two field-installable additional accessory modules for control and triggering. Available modules include (1) IEEE-488 (GPIB), (2) dual trigger LXI-compliant LDVS driver ports, and (3) three USB 3.0 ports and one Ethernet interface.




Users who are comfortable with the General Purpose Interface Bus (GPIB) remote interface can order the field-installable option at any time.

Contact the professionals at Fiber Optic Center for a quote or to get more details.

focenter.com • 508-992-6464 | (800) 473-4237 • sales@focenter.com

23 Centre Street • New Bedford, MA 02740 USA



Manufacturer:
Viavi

Product Name:
Viavi MAP-300 3-Slot Mainframe

Manufacturer Part Number:
MAP-330A-B

>> Find Out More Details on the Viavi MAP-300 3-Slot Mainframe <<

MAP Control Center (MAPcc)

VIavi now offers the MAP Control Center (MAPcc), an asset management tool for MAP mainframes and cassettes. The MAPcc simplifies network management via a single screen that lists a full inventory of all your assets, enabling you to explore internal and external mainframes as well as the cassettes present in those mainframes. From the list of available mainframes, you can retrieve IP addresses, firmware versions and serial numbers, and you can search for a specific type of cassette, fiber or connector. The MAPcc lets you upgrade multiple mainframes at the same time using the upgrade center, as well as retrieve log files.


Model	IP	Hostname	PartNumber	SerialNumber	Version	MfgDate	Slot1	Slot2	Slot3	Slot4	Slot5	Slot6	Slot7	Slot8	Slot9	Slot10	Slot11	Slot12	Plugin1	Plugin2	Licenses	Tag	Description	Hosts
MAP-300	10.14.140.11	876232-A	MAP-300CH	1100438	7.0.1	4/9/2020																		
MAP-300	10.14.140.13		MAP-300	0	5.1.4		BBS	VOA	OSW	OPM														
MAP-300	10.14.140.15		MAP-300-2392	2292	5.1.8		EDFA	UTIL	UTIL	VOA														
MAP-300	10.14.140.16		MAP-300-1256	1256	7.0.3		SRC	SOM	SOM	SOM														
MAP-300	10.14.140.27		MAP-300-1553	1553	7.0.3			LCS	OPM	OPM	OSW													
MAP-300	10.14.140.29		MAP-300CH	1100031	7.0.0178	11/17/2018	VOA	VOA	OSW	UTIL	SOM	OPM	EDFA											
MAP-300	10.14.140.48		MAP-300-3207	3207	7.0.3			TLG	SRC	SRC	OSW													
MAP-300	10.14.140.31		MAP-300-8	1100058	7.0.0178	4/9/2019	OSW		OSW															
MAP-300	10.14.140.36		MAP-300-9	20817	5.2.7		VOA	PCK	PCK															
MAP-300	10.14.140.34	876232	MAP-300CH	1100411	6.2.0	3/21/2020	OSW	OSW	OSW	OSW	OPM	OPM												
MAP-300	10.14.140.37		MAP-300CLD	MAP-300CLD-A	51729VC	5.8.2	6/27/2017	SRC	OLM															
MAP-300	10.14.140.49		MAP-300-395	395	7.0.3						EDFA	EDFA												
MAP-300	10.14.140.50		MAP-300	282	5.3.11																			
MAP-300	10.14.140.51		MAP-300CLD	MAP-300CLD-A	41681COC	4.8.16	10/14/2016																	
MAP-300	10.14.140.52		MAP-300-33	1100013	7.0.0186	11/20/2019	SOM																	
MAP-300	10.14.140.54		MAP-300-7	1100100	7.0.0178	4/21/2019	VOA	VOA	OPM	BBS	OPM	TLG												
MAP-300	10.14.140.57		MAP-300-14	1100222	7.1.0187	7/31/2019	SRC																	
MAP-300	10.14.140.57		MAP-300-2	1100019	7.0.0178	1/17/2018	SRC	TLG	SRC	SRC	VOA	OPM	SMN	TLG										
MAP-300	10.14.140.98		MAP-300-371	371	5.0.10		OPM	OPM	BBS	VOA	SRC	EDFA												
MAP-300	10.14.140.66		MAP-300-0	22176	7.0.3																			
MAP-300	10.14.140.19		MAP-300-20308	20308	5.1.9																			
MAP-300	10.14.140.166		MAP-300CLD	PN14563890	S000GL123	7.0.0	1/1/2013																	
MAP-300	10.14.140.20		MAP-300-29823	29823	5.3.8																			
MAP-300	10.14.140.53		MAP-300CLD	MAP-300CLD-A	6242123	4.8.16	10/14/2016																	
MAP-300	10.14.140.104	876232-5	MAP-300CH	1100026	6.2.0	9/10/2019	UTIL																	
MAP-300	10.14.140.109		MAP-300-20033	20033	7.0.3																			
MAP-300	10.14.140.111		MAP-300	1100009	7.1.0193	4/23/2019	LCS																	
MAP-300	10.14.140.115		MAP-300-1180	1180	5.8.6		SRC	OPM	VOA	VOA														
MAP-300	10.14.140.116		MAP-300-4	1100015	7.0.0178	11/17/2018	OSW	OSW	OSW															
MAP-300	10.14.140.121		MAP-300CLD	6174429	4.8.16																			
MAP-300	10.14.140.134		MAP-300-963	963	5.1.9																			
MAP-300	10.14.140.138	249272	MAP-300CH	1100009	7.0.1	11/21/2018	PCK																	
MAP-300	10.14.140.148		MAP-300-2	2199	7.0.3		PCK	VOA	VOA	OSW	LCS	OSW												
MAP-300	10.14.140.151		MAP-300-2199	2199	7.0.3																			
MAP-300	10.14.140.152		MAP-300-7	1100023	7.1.0193	3/22/2019	TRX	OSW	SOM	OSW														
MAP-300	10.14.140.153		MAP-300-2	1100013	7.0.0178	8/20/2019	OSW	VOA	OSW	UTIL	UTIL	UTIL	OSW											
MAP-300	10.14.140.157		MAP-300-13	1100016	7.1.0199	7/30/2019	TLG	VOA	EDFA	EDFA	EDFA	OSW	PCK	SRC										
MAP-300	10.14.140.158		MAP-300-824	824	7.0.3		SRC	SOM	OSW	OSW	BBS	UTIL												
MAP-300	10.14.140.163	876232-A	MAP-300CH	1100117	7.0.1	11/20/2019																		
MAP-300	10.14.140.164		MAP-300CLD	MAP-300CLD-A	6154519	4.8.16	11/17/2016																	

Slot	Part	Device	Firmware	PartNumber	SerialNumber	FlowType	ConnectorType	License
1	8201	TLG	3.0.3	MTLG-GC1L1				
2	8202	EDFA	1.3.9	MEDFA11CF-M100-MFA				
3	8203	VBR	3.1.9	mVBR-C150-M103-MFP				
4	8204	EDFA	1.3.9	MEDFA11CA-M100-MFA				
5	8205	EDFA	1.3.9	MEDFA11CA-M100-MFA				
6	8206	EDFA	1.3.9	MEDFA11CB-M100-MFA				
7	8207	PCK	1.2.7	MPCCK119F-M103-MFA				
8	8208	SRC	3.4.11	MSRC-C20035A-M100-MFP				

Type	IP	Hostname	Part Number	Serial Number	Completed	Version	Available	Progress	Status
MAP-300	10.14.140.11	876232-A	MAP-300	1100438	No	5.1.4	5.1.4	0%	Not Started
MAP-300	10.14.140.11	876232-A	MAP-300	1100438	No	7.0.1	7.0.1	0%	Not Started

Contact the professionals at Fiber Optic Center for a quote or to get more details.

focenter.com • 508-992-6464 | (800) 473-4237 • sales@focenter.com
23 Centre Street • New Bedford, MA 02740 USA



Manufacturer:
Viavi

Product Name:
Viavi MAP-300 3-Slot Mainframe

Manufacturer Part Number:
MAP-330A-B

>> Find Out More Details on the Viavi MAP-300 3-Slot Mainframe <<

MAP Chassis Selection Guide


VIavi offers a variation of chassis, the table below summaries their key attributes of each chassis and why it would be ideal for you.

Chassis	Modular Family	Configuration	Size	Modular	Slots	Controller Touchscreen	Super Apps	Optional Touchscreen	Remote Control	Field Replaceable Controller	Optional Plug-in Modules		
MAP-330	LightDirect and LightTest	Benchtop and Rackmount	3U, 1/2 19" rack	Yes	3	3.5-in touchscreen for network/system controls	Yes	USB 15.6-in display, 1920X1080 resolution. Docks to benchtop	Ethernet	Yes	GPIB, USB/LAN, Expansion, LXI Trigger		
MAP-380		Benchtop, Rackmount and Reverse Rackmount	3U, 19" rack		8			320 X 240 resolution				USB 15.6-in display, 1920X1080 resolution. Does not dock	
MAP-220C	LightDirect Only	Benchtop, Rackmount and Reverse Rackmount	2U, 1/2 19" rack	Yes	2	3.5-in touchscreen that replaces the need for a PC	No	No	Ethernet	Yes	GPIB		
MAP-202C	mISW-C1 Optical Switch only	Benchtop and Rackmount	2U, 1/2 19" rack	No	NA < 75 ports					No		No	No
MAP-204C		Benchtop and Reverse Rackmount	4U, 19" rack		NA < 160 ports								

Contact the professionals at Fiber Optic Center for a quote or to get more details.

focenter.com • 508-992-6464 | (800) 473-4237 • sales@focenter.com

23 Centre Street • New Bedford, MA 02740 USA



Manufacturer:
Viavi

Product Name:
Viavi MAP-300 3-Slot Mainframe

Manufacturer Part Number:
MAP-330A-B

>> Find Out More Details on the Viavi MAP-300 3-Slot Mainframe <<

Mainframe Specifications


The table below provides specifications for MAP-300 mainframes. For MAP Series cassettes, refer to the user guide for each cassette.

Parameters	MAP-330	MAP-380
Mainframe Chassis		
Capacity (Single-width cassettes)	3 cassettes	8 cassettes
Rackmount Kit		Optional
Benchtop Kit		Optional
Controller (MAP-300CLD-B)		
Operating System		Linux
Local Touchscreen	3.5-in touchscreen for network/system status controls, 320 x 240 resolution	
Power Supply	100 to 240 V AC, 50/60 Hz, Auto-switching	
Power Consumption	450 VA MAX	450 VA MAX
Field Replaceable		Yes
Bays for Plug-in Modules		2
Native Ports/Interfaces		
USB 3.0 Host		1 front
USB 3.0 (Mouse, Keyboard, etc.)		4 rear
Ethernet 10/100/1000BASE-T		1 rear
Monitor port		1 rear
Optical Plug-in Modules	GPIB, USB/LAN Expansion, Trigger	
Automation		
Driver Type		IVI compliant
Standard/Protocol		LXI, VXI-11, SCPI
Driver Compatibility	LabView™, LabWindows™, Microsoft® Visual C++, Microsoft® Visual Basic®	
Accessibility		Multiuser sharing support
Web GUI Compatibility	Google Chrome, Mozilla Firefox or Microsoft Edge	
Laser Interlock (See the MAP Series Safety and Compliance Reference Guide, 22112369-325, for more information.)		
Local Interlock		Software controlled
Remote Interlock		2-pin terminal block at rear controller
Mechanical		
Dimensions of rackmount (W x H x D)	24.61 x 13.26 x 38.63 cm (9.6 x 5.2 x 15.2 in)	48.26 x 13.26 x 38.63 cm (19 x 5.2 x 15.2 in)
Dimensions of benchmount (W x H x D)	26.43 x 15.49 x 44.27 cm (10.4 x 6.1 x 17.5 in)	46.94 x 15.49 x 44.27 cm (18.5 x 6.1 x 17.5 in)
Weight		
Benchtop Mainframe	10 kg (22 lb)	12.6 kg (27.7 lb)
Rackmount Mainframe	74 kg (16.3 lb)	10.8 kg (23.8 lb)
Environment		
Operating Temperature		0 to 50°C
Storage Temperature		-30 to 60°C
Relative Humidity		5% to 85% non-condensing

Contact the professionals at Fiber Optic Center for a quote or to get more details.

focenter.com • 508-992-6464 | (800) 473-4237 • sales@focenter.com

23 Centre Street • New Bedford, MA 02740 USA



Manufacturer:
Viavi

Product Name:
Viavi MAP-300 3-Slot Mainframe

Manufacturer Part Number:
MAP-330A-B

>> Find Out More Details on the Viavi MAP-300 3-Slot Mainframe <<

Optional 15.6-inch Touchscreen (MAP-300AKD) Specifications

Parameter	Specification
Dimensions	16-in x 9-in
Resolution	1080p (1920x1080)
Dock to Benchtop Mainframe	
MAP-330	Supported
MAP-380	Not Supported
Power/Interface to Mainframe	
MAP-330	USB cable or docking connector
MAP-380	USB cable
Weight	2.7 kg (5.95 lb)

Ordering Information

For more information on this or other products and their availability, please contact your local VIAVI account manager or VIAVI directly at 1-844-GO-VIAVI (1-844-468-4284) or to reach the VIAVI office nearest you, visit viavisolutions.com/contacts.


MAP-300 Mainframes

Chassis Slot Number	Description	Part Number
Three-Slot Mainframe	MAP-330A 3 Slot 3U 19-in LightTest Basic Mainframe	MAP-330AB-B
	MAP-330A 3 Slot 3U Half 19-in LightTest Benchtop Mainframe	MAP-330A-B
	MAP-330A 3 Slot 3U Half 19-in LightTest Benchtop Mainframe with Touchscreen	MAP-330AD-B
	MAP-330A 3 Slot 3U Half 19-in LightTest Rackmount Mainframe	MAP-330AX-B
Eight-Slot Mainframe	MAP-380A 8 Slot 3U 19-in LightTest Benchtop Mainframe	MAP-380A-B
	MAP-380A 8 Slot 3U 19-in LightTest Rackmount Mainframe	MAP-380AX-B
	MAP-380A 8 Slot 3U 19-in LightTest Reverse Rackmount Mainframe	MAP-380AXR-B

Contact the professionals at Fiber Optic Center for a quote or to get more details.

focenter.com • 508-992-6464 | (800) 473-4237 • sales@focenter.com

23 Centre Street • New Bedford, MA 02740 USA



Manufacturer:
Viavi

Product Name:
Viavi MAP-300 3-Slot Mainframe

Manufacturer Part Number:
MAP-330A-B

>> Find Out More Details on the Viavi MAP-300 3-Slot Mainframe <<


MAP-300 Accessories and Replacement Parts

Category	Description	Part Number
Plug-in modules	MAP-300A GPIB Plug-in Module	MAP-300AGPIB
	MAP-300A Trigger Module	MAP-300ATRIG
	MAP-300 USB-LAN Expansion Module	MAP-300AUSBLAN
Replacement Equipment	MAP-330 Basic Chassis, No Controller	MAP-330CH
	MAP-380 Basic Chassis, No Controller	MAP-380CH
	MAP-380 Reverse Basic Chassis, No Controller	MAP-380RCH
	MAP-300 Modular Controller	MAP-300CLD-B
	Cassette Extraction Latch Kit – Button	MAP-300ACC010
	Cassette Extraction Latch Kit – Legacy	MAP-300ACC011
Optional Touchscreen	15.6-inch Touchscreen	MAP-300AKD
Kits	MAP-330A 3 slot Half 19-in 15.6-in Touchscreen Conversion Kit	MAP-300AKD-B
	Rackmount Conversion Kit, MAP-380	MAP-300ACC01
	Rackmount Conversion Kit, MAP-330	MAP-300ACC02
	Benchtop Conversion Kit	MAP-300ACC03
	Rackmount Kit. 15.6-in Touchscreen	MAP-300ACC04
Protection/Security	Retention Bar for MAP-380 Rackmount and Reverse Rackmount Mainframes	MAP-300ACC05
	Hard Case, MAP-330	MAP-300ACC06
	Hard Case, MAP-380	MAP-300ACC07
	15.6-in Touchscreen Hardcover	MAP-300ACC08
	15.6-in Touchscreen Screen Protector	MAP-300ACC09

Contact the professionals at Fiber Optic Center for a quote or to get more details.

focenter.com • 508-992-6464 | (800) 473-4237 • sales@focenter.com

23 Centre Street • New Bedford, MA 02740 USA



Manufacturer:
Viavi

Product Name:
Viavi MAP-300 3-Slot Mainframe

Manufacturer Part Number:
MAP-330A-B

>> Find Out More Details on the Viavi MAP-300 3-Slot Mainframe <<

LightDirect and LightTest Modular Families for the MAP System

MAP mainframes are the foundation to our entire portfolio of functional modules, enabling scalability and efficiency for manufacturing optical network elements and modules. The MAP-300 series replaces the highly successful MAP-200. It is compatible with all our current cassettes and legacy cassette (all -C1, -C2 and -B1 modules). The cassette modules fall into two different families, the LightTest turn-key solutions and LightDirect configurable solutions to meet each customer’s exact needs.

Light Direct

The LightDirect family includes a wide range of foundational optical test modules that are used in simple bench test applications, or combined in larger, multi-modules customer driven automated test systems. They are easy-to-control, single-functionality modules.



Optical Sources and Amplifiers	Optical Signal Conditioning	Optical Signal Switching and Routing	Optical Power and Spectral Measurements
<p>mTLG-C2 is a distributed feedback (DFB) laser that steps between frequencies of the 50 GHz ITU grid. It is available in either C or L band, and with up to four lasers per module.</p> <p>mSRC-C2 is a general-purpose light source in key fixed telecom wavelengths: 850, 1300, 1310, 1490, 1550, 1625 nm.</p> <p>These sources typically are used to test system load or continuity, measure insertion loss, or for test station calibration.</p> <p>mBBS-C1 is a broadband source that provides an amplified spontaneous emission (ASE) output for stable and spectrally flattened C-and L-band sources.</p> <p>mSRC-C23000SA is a variant of the mSRC-C2 that behaves as a semiconductor O-band optical amplifier (SOA) with polarization-independent optical amplifier.</p>	<p>mVOA-C1 is the industry's most compact modular solution. Available with one, two, or four variable optical attenuators (VOA) per module with or without an internal power meter. The mVOA is the industry's leading variable optical attenuator family, enabling single-level control for receiver and amplifier testing for over 20 years.</p> <p>mUTL-C1 is a passive utility module includes, couplers, splitters, mux/demux, band-pass filters and even blank modules for customer supplied components.</p> <p>mPCX-C1 is a polarization scrambler that scrambles, controls and provides stabilization for applications such as temporal depolarization and 100G+ coherent interface testing.</p> <p>mTFX-C1 is a multiport tunable filter that simplifies test signal management for next-generation 100 G+ interface, sub-systems and system test.</p>	<p>mOSW-C1/mISW are the industry's gold standard for loss and repeatability. With over 80 variations available, there is a configuration ideally suited to all applications. Switches range from 1x4 to 1x64 with options for internal power monitoring, direction monitoring, and power trim.</p> <p>mOSX-C1 is a cross connect optical switch that provides high performance and reliability. Available as a 16- or 32-port common connection (CC) cassette, the mOSX supports any-to-any port combinations up to the total number of ports on the cassette. It also supports MxN combinations</p>	<p>mOPM-C1 optical power meters are available with one, two, or four power heads per module with four unique performance ranges. There are versions available for all applications. Models with 110 dBm dynamic range are complimented by versions that support 26 dBm input power.</p> <p>mHROSA-A1 is a high-resolution optical spectrum analyzer that combines sub-GHz resolution performance and compact modularity in a single slot cassette.</p>

Contact the professionals at Fiber Optic Center for a quote or to get more details.

focenter.com • 508-992-6464 | (800) 473-4237 • sales@focenter.com

23 Centre Street • New Bedford, MA 02740 USA



Manufacturer:
Viavi

Product Name:
Viavi MAP-300 3-Slot Mainframe

Manufacturer Part Number:
MAP-330A-B

>> Find Out More Details on the Viavi MAP-300 3-Slot Mainframe <<



The LightTest family are application specific, integrated test solutions that leverage the power of the MAP Series Super-Application or PC based software. Built with specialized MAP modules or assemblies of LightDirect modules, LightTest solutions are typically used in bench test applications but can also be combined in larger, multi-modules customer driven automated test systems.



Passive Connector Test Solutions

The VIAVI Solutions passive component/connector test solution (PCT) consists of a powerful family of modules, software, and peripherals for testing IL, RL, physical length, and polarity of optical connectivity products. Leveraging the modularity and connectivity of the VIAVI MAP platforms.



Single Fiber Insertion Loss and Return Loss Test System

The PCT-rm is a MAP-220 based Single mode Insertion Loss (IL) and Return Loss (RL) test meter for single fiber connector applications. Part of the MAP Series PCT solution family, it features fully EF-compliant multimode Insertion Loss test meters with connector adapters that can be configured for all connectivity applications to ensure maximized productivity.



Swept Wavelength System

mSWS-C1 are swept wavelength test solutions for manufacturing and new device development of passive DWDM devices, ROADMs & Circuit Packs. Provides full characterization of wavelength.



Optical Component Environmental Test Systems

At the core of OCETS Plus is a pair of custom-grade programmable switches (1xN configuration). OCETS switches are specified to higher levels of IL repeatability and background RL than analogue-grade switches.

Contact the professionals at Fiber Optic Center for a quote or to get more details.

focenter.com • 508-992-6464 | (800) 473-4237 • sales@focenter.com

23 Centre Street • New Bedford, MA 02740 USA